

CONNECT 240 + 241 FOOD

Soft sleeve to slide onto connectors or push into pipes, foodgrade

Applications:

food industry, pharmaceutical industry: food, pharmaceutical
vacuum conveying device, vacuum hopper, suction conveyor, dosing system
pelleting machines/ tablet presses
industrial vacuum cleaners, vacuum cleaners

Properties:

easily and quickly fitted
re-usable (threaded version)
gas- and liquid-tight as pre-fitted version
highly abrasion resistant
Food grade wall, complies with: EU-Directive 10/2011 and EC 1935/2004 and the latest EU-Directive 2015/174
odorless and tasteless
microbe and hydrolysis resistant
good resistance to oil, gasoline, and chemicals
conforms to RoHS guideline

Temperature range:

-40°F to 195°F
short time to 255°F

Design, material:



wall: special premium ether-polyurethane (Pre-PUR®)

Delivery variants:

further diameters available on request
special colors: full colored

Suitable for hose

AIRDUC®: 350 (AS / AS BLACK / FOOD-AS); 351 + 355 + 356 (FOOD / INOX FOOD-AS)

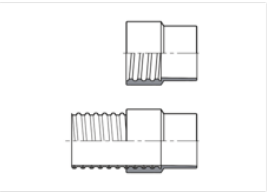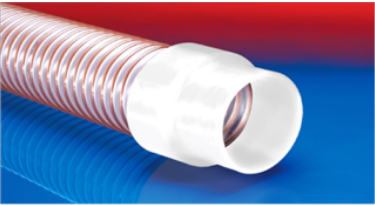

Recomended adapter-Ø inch	Rec. Adapter length inch	Threading depth of hose inch	Total length (Inch)	Weight lbs/pcs	Suitable for hose I.D. inch	Order No.	suitable for box
pre-fitted							
1.25	1.73	1.57	3.35	0.15	1.25	241-0032-8550	Yes
1.50	1.73	1.57	3.35	0.15	1.50	241-0038-8550	Yes
1.57	1.73	1.57	3.35	0.18	1.57	241-0040-8550	Yes
2.00	1.93	1.61	3.54	0.18	2.00	241-0050-8550	Yes
2.36	1.93	1.61	3.54	0.26	2.36	241-0060-8550	Yes
2.76	2.05	1.73	3.94	0.33	2.76	241-0070-8550	Yes
3.00	2.36	1.85	4.21	0.44	3.00	241-0075-8550	Yes
3.15	2.36	2.05	4.41	0.55	3.15	241-0080-8550	Yes
4.00	2.56	2.24	4.80	0.68	4.00	241-0100-8550	Yes
5.00	2.95	2.44	5.39	1.06	5.00	241-0125-8550	Yes
6.00	3.35	2.76	6.10	1.50	6.00	241-0150-8550	Yes
8.00	3.94	3.15	7.09	2.43	8.00	241-0200-8550	Yes
9.84	4.13	3.54	7.68	3.31	9.84	241-0250-8550	Yes
11.81	4.50	3.94	8.46	4.98	11.81	241-0300-8550	Yes
Threaded; Suitable for Hose 350, 351, 355, 533, 341, 345							
1.25	1.73	1.57	3.35	0.15	1.25	241-0032-8600	Yes
1.50	1.73	1.57	3.35	0.19	1.50	240-0038-0010	Yes
1.57	1.73	1.57	3.35	0.19	1.57	240-0040-0010	Yes
2.00	1.93	1.61	3.54	0.20	2.00	240-0050-0010	Yes
2.36	1.93	1.61	3.54	0.26	2.36	240-0060-0010	Yes
2.76	2.05	1.73	3.94	0.32	2.76	240-0070-0010	Yes
3.00	2.36	1.85	4.21	0.44	3.00	241-0075-8600	Yes
3.15	2.36	2.05	4.41	0.55	3.15	241-0080-8600	Yes

4.00	2.56	2.24	4.80	0.68	4.00	241-0100-8600	Yes
5.00	2.95	2.44	5.39	1.06	5.00	241-0125-8600	Yes
6.00	3.35	2.76	6.10	1.50	6.00	241-0150-8600	Yes
8.00	3.94	3.15	7.09	2.43	8.00	241-0200-8600	Yes
9.84	4.13	3.54	7.68	3.31	9.84	241-0250-8600	Yes
11.81	4.50	3.94	8.46	4.98	11.81	241-0300-8600	Yes
Threaded; Suitable for Hose 356							
1.50	1.73	1.57	3.35	0.15	1.50	241-0038-8601	Yes
1.57	1.73	1.57	3.35	0.18	1.57	241-0040-8601	Yes
2.00	1.93	1.61	3.54	0.18	2.00	241-0050-8601	Yes
2.36	1.93	1.61	3.54	0.26	2.36	241-0060-8601	Yes
2.76	2.05	1.73	3.94	0.33	2.76	241-0070-8601	Yes
3.00	2.36	1.85	4.21	0.44	3.00	241-0075-8601	Yes
3.15	2.36	2.05	4.41	0.55	3.15	241-0080-8601	Yes
4.00	2.56	2.24	4.80	0.68	4.00	241-0100-8601	Yes
5.00	2.95	2.44	5.39	1.06	5.00	241-0125-8601	Yes
6.00	3.35	2.76	6.10	1.50	6.00	241-0150-8601	Yes
8.00	3.94	3.15	7.09	2.43	8.00	241-0200-8601	Yes
9.84	4.13	3.54	7.68	3.31	9.84	241-0250-8601	Yes
11.81	4.50	3.94	8.46	4.98	11.81	241-0300-8601	Yes